



# PDT Series

thin power distribution

high density power strips feature a slim, low-profile design

features:

- Slim low-profile design requires minimum space
- Up to 20 outlets depending on model
- Lightweight aluminum chassis
- Field configurable single or dual circuits available in both 15 & 20 amp models
- Field configurable isolated ground models available
- Models available with remote notification of surge protection status
- Models available with local amp metering
- Mounting hardware included
- Corded models include 9' or 20' SignalSAFE™ power cord terminated with NEMA 5-15P / 5-20P / L5-20P plug depending on model
- Black anodized finish
- Top feed models available
- ETL Listed in the US and Canada

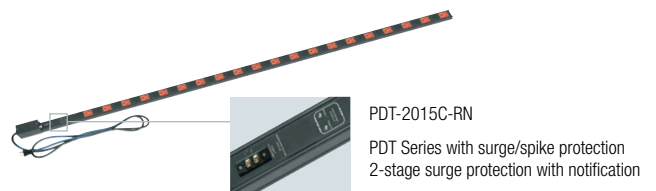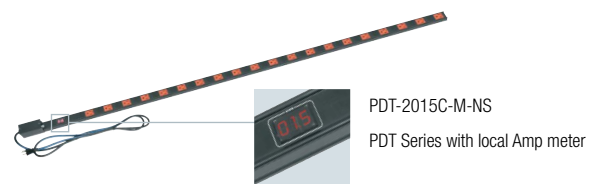

specifications:

High density thin power distribution shall be Middle Atlantic Products model # PDT-\_\_\_-\_\_\_ with \_\_\_ outlets and \_\_\_ amps (refer to chart). Thin power distribution shall be \_\_\_ long (refer to chart) x 1" deep x 1.9" (20 amp models) or 1.3" (15 amp models) wide. J-Box shall be 2.1" deep X \_\_\_" (refer to chart). Thin power distribution shall feature \_\_\_ NEMA 5-15R / 5-20R outlets (refer to chart). Corded power strip include \_\_\_ amp protection and mounting hardware (refer to chart). Corded models shall be terminated with 9' or 20' SignalSAFE™ power cord and NEMA 5-15P / 5-20P / L5-20P plug (refer to chart). Thin power distribution shall be available with remote notification of surge protection (refer to chart). Thin power distribution shall be available with local amp metering (refer to chart). PDT Series shall feature a black anodized finish. Regular and top feed models shall be provided to accommodate installations where ground prongs must be positioned at the top of each outlet. PDT Series with J-Box shall feature field configurable single or dual circuits available in both 15 & 20 amp models. PDT Series with J-Box shall feature field configurable isolated ground models. PDT shall include a permanently installed supplementary grounding and bonding stud. PDT Series shall be ETL listed to UL Standard 1363 in the US and to CAN/CSA C22.2 #21 in Canada. PDT shall be RoHS EU Directive 2002/95/EC compliant. PDT shall be manufactured by an ISO 9001 registered company. PDT shall be warrantied to be free from defects in material or workmanship under normal use and conditions for a period of three years.

Customizable specification clips available at [middleatlantic.com](http://middleatlantic.com)



what **great systems** are built on.™

A Group brand | **legrand**


**Middle Atlantic Products**  
middleatlantic.com | middleatlantic.ca

96-01031 / rev c / 3-10-15

# PDT Series

## 15 Amp basic dimensions

all dimensions in inches unless otherwise noted [all dimensions in brackets are in millimeters]

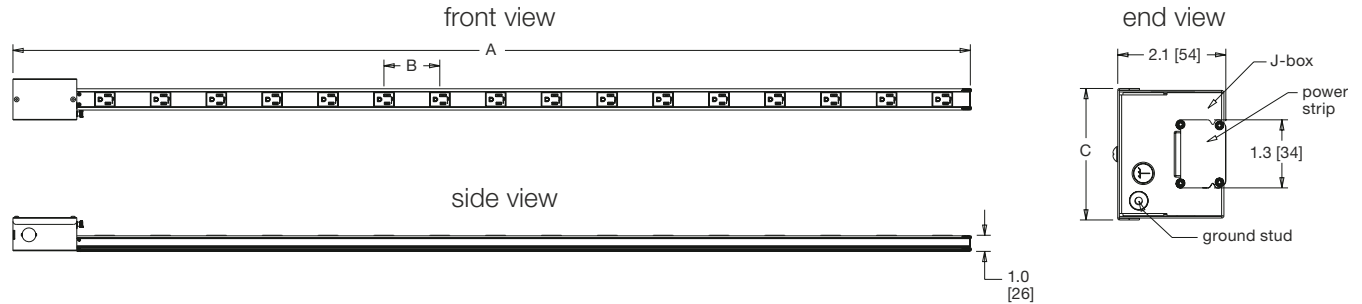

- Notes:
- 1) On corded models allow for a minimum of 2 [51] cord bending space
  - 2) PDT series include SignalSAFE™ power cord technology

| Part #         | A Overall Length | B Outlet Spacing | C Width   | # of Outlets | Ammeter | Surge Protection                    | Cord Length/Termination    | Outlet Type | Circuit               | Isolated Tech. Ground | Overcurrent Protection | J-Box/Cord Location |
|----------------|------------------|------------------|-----------|--------------|---------|-------------------------------------|----------------------------|-------------|-----------------------|-----------------------|------------------------|---------------------|
| PDT-615C       | 29.5 [749]       | 4.33 [110]       | 1.58 [40] | 6            | none    | single stage                        | 9' cord w/NEMA 5-15P plug  | 5-15R       | 1                     | no                    | circuit breaker        | bottom              |
| PDT-615C-NS    | 29.5 [749]       | 4.33 [110]       | 1.58 [40] | 6            | none    | none                                | 9' cord w/NEMA 5-15P plug  | 5-15R       | 1                     | no                    | circuit breaker        | bottom              |
| PDT-1015C-NS   | 37.71 [958]      | 3.50 [89]        | 1.58 [40] | 10           | none    | none                                | 9' cord w/NEMA 5-15P plug  | 5-15R       | 1                     | no                    | circuit breaker        | bottom              |
| PDT-1015C-NS20 | 37.71 [958]      | 3.50 [89]        | 1.58 [40] | 10           | none    | none                                | 20' cord w/NEMA 5-15P plug | 5-15R       | 1                     | no                    | circuit breaker        | bottom              |
| PDT-1015C-RN   | 37.75 [959]      | 2.62 [67]        | 1.58 [40] | 10           | none    | 2 stage surge w/status notification | 9' cord w/NEMA 5-15P plug  | 5-15R       | 1                     | no                    | circuit breaker        | bottom              |
| PDT-1015C-M-NS | 37.75 [959]      | 2.62 [67]        | 1.58 [40] | 10           | yes     | none                                | 9' cord w/NEMA 5-15P plug  | 5-15R       | 1                     | no                    | circuit breaker        | bottom              |
| PDT-2X615S     | 30.00 [762]      | 2.14 [55]        | 2.58 [66] | 12           | none    | single stage                        | j-box                      | 5-15R       | 1 or 2 (field config) | field config          | none                   | bottom              |
| PDT-1415C      | 59.5 [1511]      | 4.00 [102]       | 1.58 [40] | 14           | none    | single stage                        | 9' cord w/NEMA 5-15P plug  | 5-15R       | 1                     | no                    | circuit breaker        | bottom              |
| PDT-1415C-NS   | 59.5 [1511]      | 4.00 [102]       | 1.58 [40] | 14           | none    | none                                | 9' cord w/NEMA 5-15P plug  | 5-15R       | 1                     | no                    | circuit breaker        | bottom              |
| PDT-1615C-NS   | 33.50 [851]      | 1.82 [46]        | 1.58 [40] | 16           | none    | none                                | 9' cord w/NEMA 5-15P plug  | 5-15R       | 1                     | no                    | circuit breaker        | bottom              |
| PDT-2X815      | 60.00 [1524]     | 3.50 [89]        | 2.58 [66] | 16           | none    | none                                | j-box                      | 5-15R       | 1 or 2 (field config) | field config          | none                   | bottom              |
| PDT-2015C-M-NS | 72.72 [1847]     | 3.09 [79]        | 1.58 [40] | 20           | yes     | none                                | 9' cord w/NEMA 5-15P plug  | 5-15R       | 1                     | no                    | circuit breaker        | bottom              |
| PDT-2015C-RN   | 72.72 [1847]     | 3.09 [79]        | 1.58 [40] | 20           | none    | 2 stage surge w/status notification | 9' cord w/NEMA 5-15P plug  | 5-15R       | 1                     | no                    | circuit breaker        | bottom              |
| PDT-2015C-NS   | 72.72 [1847]     | 3.50 [89]        | 1.58 [40] | 20           | none    | none                                | 9' cord w/NEMA 5-15P plug  | 5-15R       | 1                     | no                    | circuit breaker        | bottom              |
| PDT-2X1015     | 73.25 [1861]     | 3.50 [89]        | 2.58 [66] | 20           | none    | none                                | j-box                      | 5-15R       | 1 or 2 (field config) | field config          | none                   | bottom              |
| PDT-2X1015T    | 73.25 [1861]     | 3.50 [89]        | 2.58 [66] | 20           | none    | none                                | j-box                      | 5-15R       | 1 or 2 (field config) | field config          | none                   | top                 |
| PDT-2X1015TS   | 72.75 [1848]     | 3.50 [89]        | 1.58 [40] | 20           | none    | none                                | j-box                      | 5-15R       | 1 or 2 (field config) | field config          | none                   | top                 |

what great systems are built on.™


A Group brand | **legrand**

**Middle Atlantic Products**  
middleatlantic.com | middleatlantic.ca

# PDT Series

## 20 Amp basic dimensions

all dimensions in inches unless otherwise noted [all dimensions in brackets are in millimeters]

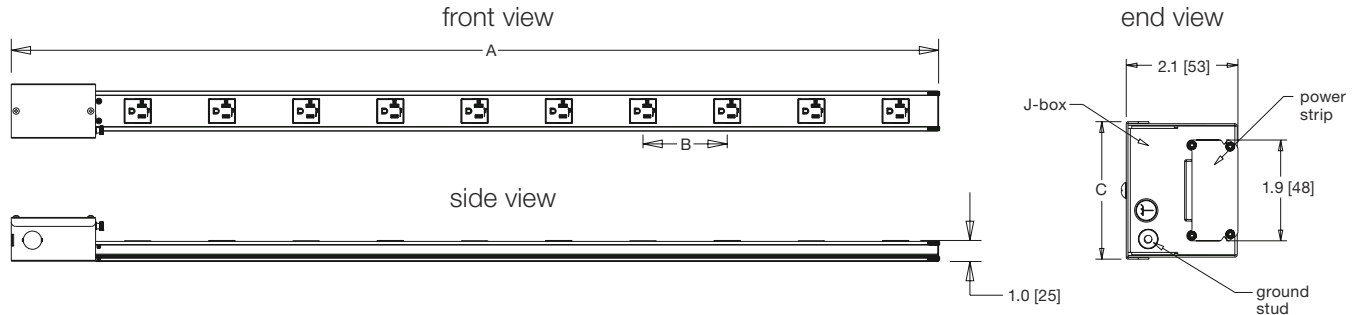

- Notes:
- 1) On corded models allow for a minimum of 2 [51] cord bending space
  - 2) PDT series include SignalSAFE™ power cord technology

| Part #          | A Overall Length | B Outlet Spacing | C Width   | # of Outlets | Ammeter | Surge Protection                     | Cord Length/Termination   | Outlet Type | Circuit               | Isolated Tech. Ground | Overcurrent Protection | J-Box/Cord Location |
|-----------------|------------------|------------------|-----------|--------------|---------|--------------------------------------|---------------------------|-------------|-----------------------|-----------------------|------------------------|---------------------|
| PDT-620C-NS     | 29.5 [749]       | 4.33 [110]       | 2.13 [54] | 6            | none    | none                                 | 9' cord w/NEMA 5-20P plug | 5-20R       | 1                     | no                    | circuit breaker        | bottom              |
| PDT-2X320       | 30.00 [762]      | 4.33 [110]       | 2.58 [66] | 6            | none    | none                                 | j-box                     | 5-20R       | 1 or 2 (field config) | field config          | none                   | bottom              |
| PDT-2X520       | 44.00 [1118]     | 4.00 [102]       | 2.58 [66] | 10           | none    | none                                 | j-box                     | 5-20R       | 1 or 2 (field config) | field config          | none                   | bottom              |
| PDT-1020C-NS    | 37.75 [959]      | 3.50 [89]        | 2.13 [54] | 10           | none    | none                                 | 9' cord w/NEMA 5-20P plug | 5-20R       | 1                     | no                    | circuit breaker        | bottom              |
| PDT-1220C-NS    | 59.5 [1511]      | 4.66 [118]       | 2.13 [54] | 12           | none    | none                                 | 9' cord w/NEMA 5-20P plug | 5-20R       | 1                     | no                    | circuit breaker        | bottom              |
| PDT-2X820       | 60.00 [1524]     | 3.5 [89]         | 2.58 [66] | 16           | none    | none                                 | j-box                     | 5-20R       | 1 or 2 (field config) | field config          | none                   | bottom              |
| PDT-1620C-NS    | 33.5 [851]       | 1.82 [46]        | 2.13 [54] | 16           | none    | none                                 | 9' cord w/NEMA 5-20P plug | 5-20R       | 1                     | no                    | circuit breaker        | bottom              |
| PDT-2020C-NS    | 72.75 [1848]     | 3.50 [89]        | 2.13 [54] | 20           | none    | none                                 | 9' cord w/NEMA 5-20P plug | 5-20R       | 1                     | no                    | circuit breaker        | bottom              |
| PDT-2020C-RN    | 72.75 [1848]     | 3.09 [79]        | 2.13 [54] | 20           | none    | 2 stage surge w/ status notification | 9' cord w/NEMA 5-20P plug | 5-20R       | 1                     | no                    | circuit breaker        | bottom              |
| PDT-2020C-M-NS  | 72.75 [1848]     | 3.09 [79]        | 2.13 [54] | 20           | yes     | none                                 | 9' cord w/NEMA 5-20P plug | 5-20R       | 1                     | no                    | circuit breaker        | bottom              |
| PDT-2020TL-NS   | 72.75 [1848]     | 3.50 [89]        | 2.13 [54] | 20           | none    | none                                 | 9' cord w/NEMA 5-20P plug | 5-20R       | 1                     | no                    | circuit breaker        | bottom              |
| PDT-2020TL-M-NS | 72.75 [1848]     | 3.09 [79]        | 2.13 [54] | 20           | yes     | none                                 | 9' cord w/NEMA 5-20P plug | 5-20R       | 1                     | no                    | circuit breaker        | bottom              |
| PDT-2X1020      | 73.25 [1861]     | 3.50 [89]        | 2.58 [66] | 20           | none    | none                                 | j-box                     | 5-20R       | 1 or 2 (field config) | field config          | none                   | bottom              |
| PDT-2X1020T     | 73.25 [1861]     | 3.50 [89]        | 2.58 [66] | 20           | none    | none                                 | j-box                     | 5-20R       | 1 or 2 (field config) | field config          | none                   | top                 |
| PDT-2X1020S     | 72.75 [1848]     | 3.50 [89]        | 2.13 [54] | 20           | none    | none                                 | j-box                     | 5-20R       | 1 or 2 (field config) | field config          | none                   | bottom              |
| PDT-2X1020TS    | 72.75 [1848]     | 3.50 [89]        | 2.13 [54] | 20           | none    | none                                 | j-box                     | 5-20R       | 1 or 2 (field config) | field config          | none                   | top                 |

what great systems are built on.™

A Group brand | **legrand**

**Middle Atlantic Products**  
middleatlantic.com | middleatlantic.ca