



Decora Lighting Controls

Scene Controller for Mural™ Scene Capable Lighting Controls

DESCRIPTION	CAT. NO.	RATING	COLOR*
Scene Controller: 7 Lighting-Scene Buttons plus and OFF and Group DIM BRIGHT Buttons	MN00C-1LW	No load rating, use with 120V Monet/ Mural Scene dimmers only	White, for other colors use Color Change Kits
Color Change Kits with Text for MN00C-1LW Scene Controller	DCKS7-00	—	I, W, A, G, E

Scene Enhancement Products — Compatible with Mural™ Scene Capable Lighting Controls

DESCRIPTION	CAT. NO.	RATING	COLOR*
Signal Repeater—Must be used if controlling lighting on more than one circuit. One-Way and Two-Way versions available	17100-1WY, 17100-2WY	No load rating	(Non-color item)
Contact Closure Interface—Allows control of Mural Scene Capable devices from home theater and building control systems via momentary contact inputs	177BI	No load rating	(Non-color item)
Occupancy Sensor Control Bridge— Operates Scene devices in conjunction with any Leviton Occupancy Sensor	177OC	No load rating	(Non-color item)
Infrared Receiver—Available with Wall Mount and Ceiling Mount Bezels	177IR-IWA	No load rating	Supplied with Ivory, White and Almond bezels
Hand-Held Infrared Remote Control— with 4 Scene Buttons plus OFF	177RC	No load rating	Black

Note: A Repeater must be used on any installation that uses more than one circuit.



MN00C-1LW in 80301-W

SPECIFICATIONS & FEATURES

Scene Controller

- Sends commands for up to seven distinct scenes to individual Mural Scene Capable Dimmers
- Multiple Scene Controllers can be used for multi-point access to scenes.
- Provides OFF button and two arrow-shaped buttons for group Dim and Bright control
- Local Dim/Bright adjustment on individual scene dimmers will not effect programmed scene settings.
- Green LED display for each scene button indicates selected scene
- Fast, easy scene programming: Press scene button on MN00C, adjust individual level on Mural Scene Capable dimmer, press program button on dimmer
- Controls up to 20 scene dimmers per circuit
- Streamlined, popular Decora styling enhances any interior and adds a "family look" when ganged with any Decora device
- Works with Monet, Decora Plus or any standard Decora wallplate
- Color change kits available in ivory, white, almond, gray, and black allow fast color changeover and simplify stocking inventory
- Internal MOV for surge protection
- Customized lettering for each scene button available (maximum of 8 characters and spaces) — see your Leviton representative for ordering information

Scene Enhancement Products

- Two-Way Repeater provides scene control communication link between branch circuits. One-Way Repeater allows the creation of separate scene control zones

TESTING & CODE COMPLIANCE


- UL Listed (File #E-31373 – Cat. Nos. MN00C and 177IR; File #E-66800 – Cat. Nos. 17100-1WY and 17100-2WY; File #E-600800 – Cat. Nos. 177BI and 177OC)
- CSA Certified (File #LR-3413)
- Backed by a Limited Two-Year Warranty

*COLOR

Basic Cat. No. denotes White device. For other colors, order Color Change Kits and add suffix as follows: Ivory (-I), White (-W), Gray (-G), Black (-E), and Almond (-A).

MATERIAL CHARACTERISTICS

Environmental: Flammability UL-94, V2 Rating
Operating Temperature: 32°F to 130°F

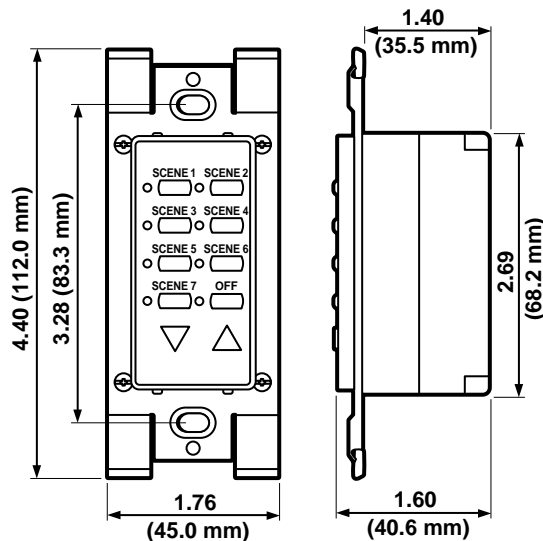

MURAL SCENE CONTROLLER
Cat. No. MN00C-1LW



Sold by:

TWAcomm.com
http://www.TWAcomm.com
Toll Free: (877) 892-2666