



# Angled MAX<sup>®</sup> Patch Panel Instructions



## Description


The angled MAX patch panel is designed to support high-density applications without the need for horizontal cable management.

Note: 48-port panel shown throughout.

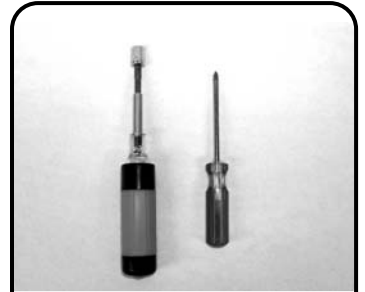

## Required Tools

- Philips screwdriver.
- 7/16-inch nut driver or equivalent for optional rear manager.

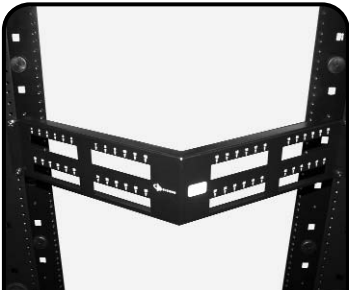

**1** Using the #12-24 screws provided, mount the patch panel to the desired position on a 19" relay rack or equivalent.



**2** Route cables to their appropriate location and cut them to length for termination. Provide sufficient amount of slack when routing to the patch panel.



**3** Terminate flat MAX modules and install into patch panel according to the instructions that accompanied the MAX modules.

Note: Only flat MAX modules can be used on the angled MAX patch panels.



**4** Install color-coded icons (as shown above) or hinged doors provided with modules into area above MAX modules to secure modules into panel. See MAX module instructions for additional details.



## Optional Manager

The WM-BK is a rear manager that is available as an option for the angled MAX panels.



**1a** Install the WM-BK using a 7/16-inch nut driver or equivalent and the 12-24 nuts that are supplied with the rear manager. Thread the nuts on the back of the patch panel mounting screws.

# Angled MAX<sup>®</sup> Patch Panel Instructions

## To assist safe installations, comply with the following:

- A. Use caution when installing or modifying telecommunications circuits.
- B. Never touch uninsulated wire terminals unless the circuit has been disconnected.
- C. Never install this device in a wet location.
- D. Never install wiring during a lightning storm.



### **Siemon — Australia**

Sydney, Australia  
Tel: (61) 2 9452 2666

### **Siemon — Canada**

Whitby, Ontario  
Tel: (1) 888-425-6165

### **Siemon — China**

Beijing, P.R. China  
Tel: (86) 10 6559 8860

### **Siemon — France**

Paris, France  
Tel: (33) 1 46 46 11 85

### **Siemon — Germany**

Frankfurt, Germany  
Tel: (49) (0) 69 97168 184

### **Siemon — Italy**

Milano, Italy  
Tel: (39) 02 64 672 209

### **Siemon — Latin America**

Coral Gables, Florida USA  
Tel: (1) 305 373 7666

### **Siemon — Southeast Asia**

Singapore  
Tel: (65) 345 9119

### **Siemon — UK**

Woking, England  
Tel: (44) (0) 1932 571771

### **Siemon — USA**

Watertown, Connecticut  
Tel: (1) 866-548-5814

