



LyriQ Keypad in Studio Design

Part No: AU5009-WH




When installed with the LyriQ Audio System, the keypad delivers high-quality sound throughout the home and garden. It features enhanced performance with an efficient class D amplifier, as well as convenient backlit buttons to indicate unit status. The new keypad also enables direct selection of the local source, as well as a convenient whole house button and an RJ45 connection for easy Cat 5-based installation.

Features/Benefits

- Presented in the elegant Studio Design.
- Select the local source input directly from the keypad.
- Integrates with current and future audio systems.
- Blends seamlessly with additional On-Q Studio products such as Selective Call Intercom, Cameras and LCD Console.

Color Options

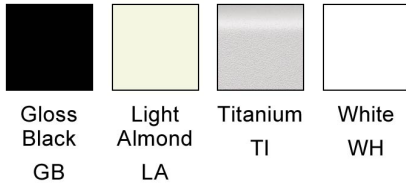

Product Specifications

Power Requirements	+24 Vdc ± 6 Vdc, 500m A average
External Power Input	+24-30 Vdc
Speaker Impedance Load	4 Ohm max
Cat 5 Cable Rating	Cat 5 UTP, 4 pair solid conductor (24 AWG)
Output and Line Out Connection	14-28 AWG Springcon Terminal Block AWG
Output Impedance	8 Ohms (1 pair of speakers)
Frequency Response	20 - 20,000 Hz ± 2 dB
IR Receive Frequency	10 KHz - 110 KHz
IR Range On-axis	25ft Max
Overall Dimensions	4.14" H x 1.65" W x 2.25" D (105.2x42x61.8mm)
Operating Temperature	0 to 55 Degrees Celsius
Storage Temperature	-25 to 75 Degrees Celsius



301 Fulling Mill Road, Suite G
 Middletown, PA 17057
 (800) 321-2343
www.onqlegrand.com



©2008 by On-Q/Legrand. All Rights Reserved.

www.onqlegrand.com