



Seamless Hubbell System Integration.

Universal Keystone Design fits into all Hubbell Products.

Standard BNC Bulkhead Connector.

Gold-Plated 75 Ohm Connections.

#### SPECIFICATIONS

- ◆ **Connector:**  
Connector Body: Brass.  
Nickel-plated: 100μ"  
Gold-plated: 2μ"
- ◆ **Performance:**  
Range: 1500MHz  
Impedance: 75 Ohms  
Mating Cycles: 500+
- ◆ **Material:**  
Housing: Flame-retardant Polymer  
UL 94V-0

#### CABLE TERMINATION


**Cable Type:** RG6 and RG59 75 ohm Coax Cable.

#### CONNECTOR TERM

**BNC Connector:**  
Used for professional video connections, both for analog and amateur radio antenna connections, aviation electronics and electronic test equipment. The BNC is an alternative to the RCA when used for component/composite video on commercial video devices.

## HUBBELL iStation AV Connectors, BNC

High performance  
Gold-plated  
BNC connector.

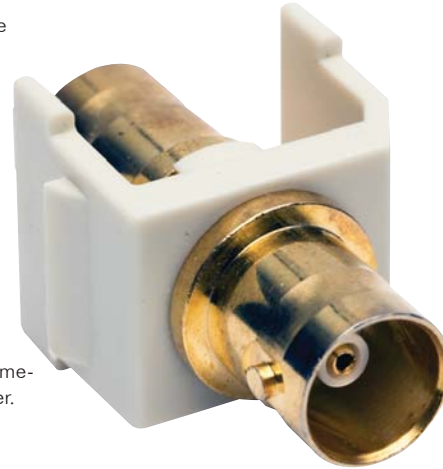

Quick and easy  
bayonet-style  
installation.

High impact, flame-  
retardant Polymer.

Hubbell's **iSTATION™** Gold and Nickel-plated BNC connectors provide a perfect solution for distributing coaxial (RG-6 & RG-59) video signal to the work station or cross-connect. Requiring no soldering, these BNC connectors install with a snap and provide a quick easy "bayonet-style" termination.

The **iSTATION™** BNC connectors are available in 7 standard Hubbell colors and mount into all **iSTATION™** face plates, modules, frames, surface housings, poke-throughs, raceway, delivery and UDX multimedia panels.

Create a customized multimedia work station by adding an Gold BNC connector along with HPW's extensive line of AV connectors, loaded modules and **XCELERATOR™** jacks.

#### APPLICATIONS SUPPORTED

- TV, CCTV, CATV, satellite and home theater.
- Projectors, flat panel TVs, entertainment systems.
- Security and surveillance systems.

#### INSTALLATION TIPS

**Important:** Always allow for clearance behind connection location to ensure for proper bend radius.

**Gold Plating:** Gold plating encapsulates the connector's base metal (brass) preventing oxidation/corrosion from forming. It also has a more transparent (signal) conductive path over Nickel (3x), which is closer to Copper it's transmitting over.

**iSTATION™ BNC AV Connector**

See Color Chart below for AV module body color.



Description  
AV Connector, BNC, Gold

Catalog No.  
**SFBNGXX**




AV Connector, BNC, Nickel


**SFBNXX**

**XX** = Housing Color: "AL" = Almond; "BK" = Black;  
"EI" = Electric Ivory; "GY" = Gray; "LA" = Light Almond;  
"OW" = Office White; "W" = White.

**DIMENSIONS**

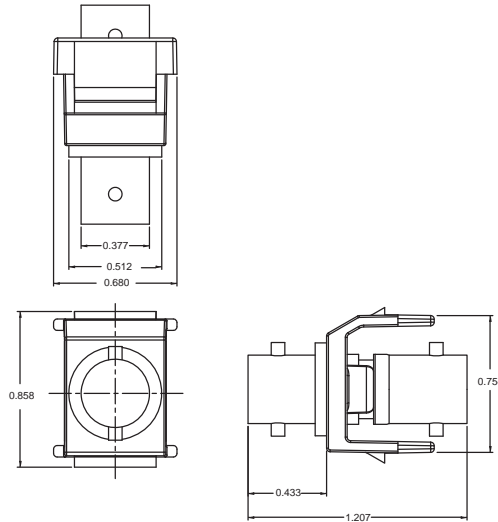

**CONNECTOR DEPTH CHART**

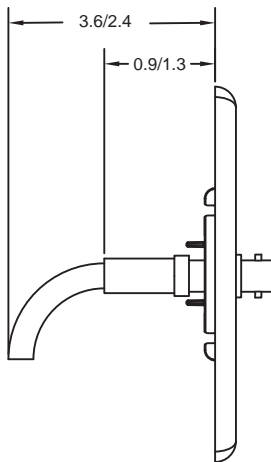

**iSTATION™ COMPATIBLE**

**Work Station and Cross-Connect Solutions**


- Front and Rear-loading Plates
- Duplex and Decorator Frames
- ISM Surface Mount Boxes
- UDX Multimedia Panels (except 1U-48)
- **NETSELECT®** Residential Network Solution
- **iFRAME®** Vertical Patch Panel

**Hubbell Delivery System**

- Hubbell **SystemOne** Poke-Throughs and Floor Boxes
- Hubbell Surface Raceway, Metal and Non-Metallic
- Multi-Connect™ Wall Boxes/Conference Table Boxes
- Power Poles



**TYPICAL APPLICATION**

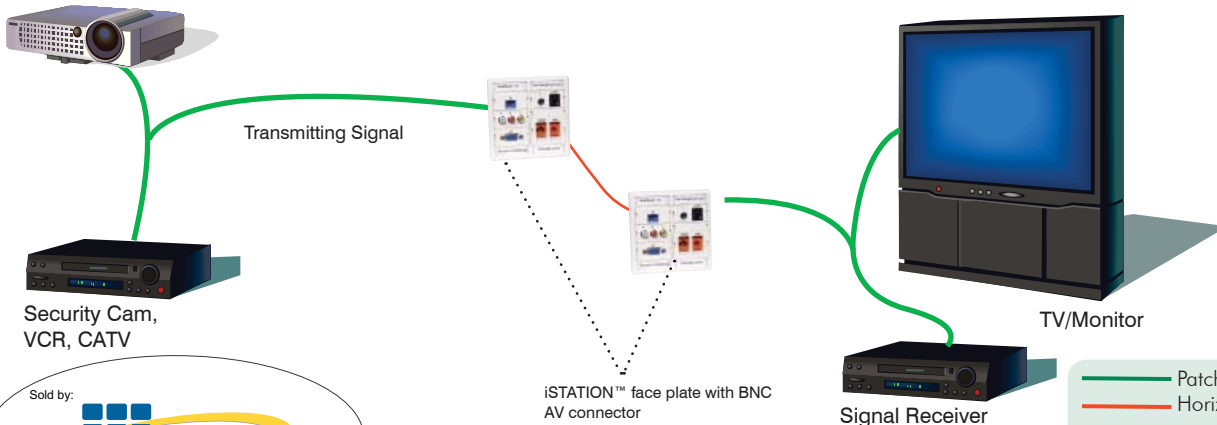

Sold by:



— Patch Cords  
— Horizontal Cable

BNC AV Module/  
Connector in a Hubbell  
iSTATION™ face plate.



**Hubbell Premise Wiring**

HUBBELL INCORPORATED (Delaware)  
14 Lord's Hill Road • Stonington, CT 06378-0901 • (860) 535-8326 • 800-626-0005  
Fax: (860) 535-8328 • Internet site: <http://www.hubbell-premise.com>

**Worldwide Locations**

Hubbell Premise Wiring, Asia Pacific  
Hubbell Canada Inc.  
Hubbell Premise Wiring, Central America  
Hubbell Premise Wiring, China  
Hubbell Premise Wiring, Europe  
Hubbell Premise Wiring, India  
Hubbell Int'l. Inc., Korea Branch

852-2836-7131  
905-839-1138  
506-309-4158  
86-21-6374 2660  
44-01283 500500  
91-80-4022-4089  
(82 2) 2607 1363

Fax: 852-2836-7132  
Fax: 905-839-9108  
Fax: 506-260-1616  
Fax: 86-21-6374 2799  
Fax: 44-01283 500400  
Fax: 91-80-4022-4033  
Fax: (82 2) 2603 7386

Hubbell Premise Wiring, Latin America  
Hubbell de Mexico, S.A. de C.V.  
Hubbell Premise Wiring, Middle East  
Hubbell Premise Wiring, Puerto Rico  
Hubbell-Taian Co., Ltd., Taiwan  
Hubbell Premise Wiring, Venezuela

305-408-4501  
(5255) 9151-9999  
971-4-393-4192  
787-855-1075  
886-2-2522-1862  
58-212-5156482

Fax: 305-408-8201  
Fax: (5255) 9151-9989  
Fax: 971-4-393-4194  
Fax: 787-855-3265  
Fax: 886-2-2522-1872  
Fax: 58-212-6627258