



Seamless Hubbell System Integration.

Universal Keystone Design fits into all Hubbell Products.

PS/2 6-pin DIN Keyboard and Mouse Signal.

Feed-thru Couplers.

SPECIFICATIONS

- ◆ **Connector:**
Connector Body: Shell: Brass.
Body: Plastic
Nickel-plated: 100μ"
 - Pin: Brass, Nickel-plated
- ◆ **Performance:**
Mating Cycles: 500+
- ◆ **Material:**
Housing: Flame-retardant
Polymer UL 94V-0
- ◆ **Signal Transmitted:**
Serial data at 10 to 16KHz with 1 stop bit,
1 start bit, 1 parity bit (odd).

CABLE TERMINATION

Cable Type:

Male 6-pin DIN patch cord.
Standard PS/2 keyboard/mouse connections.

CONNECTOR TERM

PS/2 (6-pin DIN) Connector: The 6-pin DIN PS/2 connector is used for connecting a keyboard and a mouse to a PC device. The PS/2 mouse connector generally replaced the older RS-232 "serial mouse" connector. PS/2 was developed in 1987 from the IBM Personal System/2 series computers.

The keyboard and mouse interfaces are electrically similar with the main difference being that open collector outputs are required on both ends of the keyboard interface to allow bidirectional communication. The color-coded PS/2 connection ports (purple for keyboards and green for mice).

HUBBELL iStation AV Connectors, PS/2 6-Pin DIN Coupler

Plug 'n Play-style termination.

KVM applications.



High impact, flame-retardant Polymer.

Deliver keyboard and mouse at the work area.

Hubbell's **iSTATION™** PS/2 couplers provide easy access for serial data transmissions to the work station. The PS/2 couplers utilize standard 6-pin DIN connectors for point of attachment. Terminate the PS/2 coupler with a male 6-pin pre-terminated cord attached to a keyboard, mouse, patch cord or field attachable plug customized in the field.

Requiring no soldering, these connectors install with a snap into any **iSTATION™** product, module, frame, surface housing, poke-through, raceway, delivery or even a UDX multimedia panel to distribute serial data transmissions.

Create a customized multimedia work station by adding a PS/2 coupler connector along with Hubbell's extensive line of AV connectors, loaded modules and **XCELERATOR™** jacks.

APPLICATIONS SUPPORTED

- Keyboard, mouse, laptops and desktop computers.
- KVM, servers, and gaming machines.


INSTALLATION TIPS

Termination: The PS/2 coupler utilize standard male 6-pin DIN connectors, pre-terminated to a keyboard, mouse, patch cord or field attachable customized in the field.

Important: Always allow for clearance behind connection location to ensure for proper bend radius.

CONNECTOR SPECIFICATIONS

Pins	Keyboard	Mouse
1	+DATA	DATA
2	Not Connected	Not Connected*
3	Ground	Ground
4	Vcc	+5V DC at 100 mA
5	+Clock	Clock
6	Not Connected	Not Connected*



front nose view

* Different laptops may use data for splitter cable.

** Different laptops may use Clock for splitter cable.




iSTATION™ PS/2 6-pin DIN AV Connector




Applications	Housing Color	Insulator Color	Catalog No.
Mouse	Black	Purple	SF6PM
Keyboard	Black	Green	SF6PK

Color	Description
	Mouse
	Keyboard

DIMENSIONS

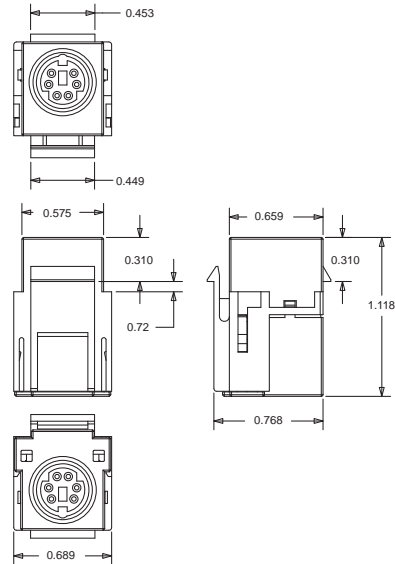

CONNECTOR DEPTH CHART

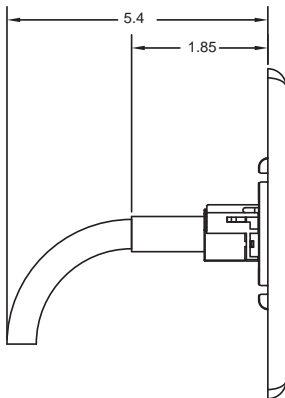

iSTATION™ COMPATIBLE

Work Station and Cross-Connect Solutions


- Front and Rear-loading Plates
- Duplex and Decorator Frames
- ISM Surface Mount Boxes
- UDX Multimedia Panels (except 1U-48)
- netSELECT™: Residential Network Solution
- iFRAME™ Vertical Patch Panel

Delivery System

- SystemOne Poke-Throughs and Floor Boxes
- Surface Raceway, Metal and Non-Metallic
- Multi-Connect™ Wall Boxes/Conference Table Boxes
- Power Poles



TYPICAL APPLICATION

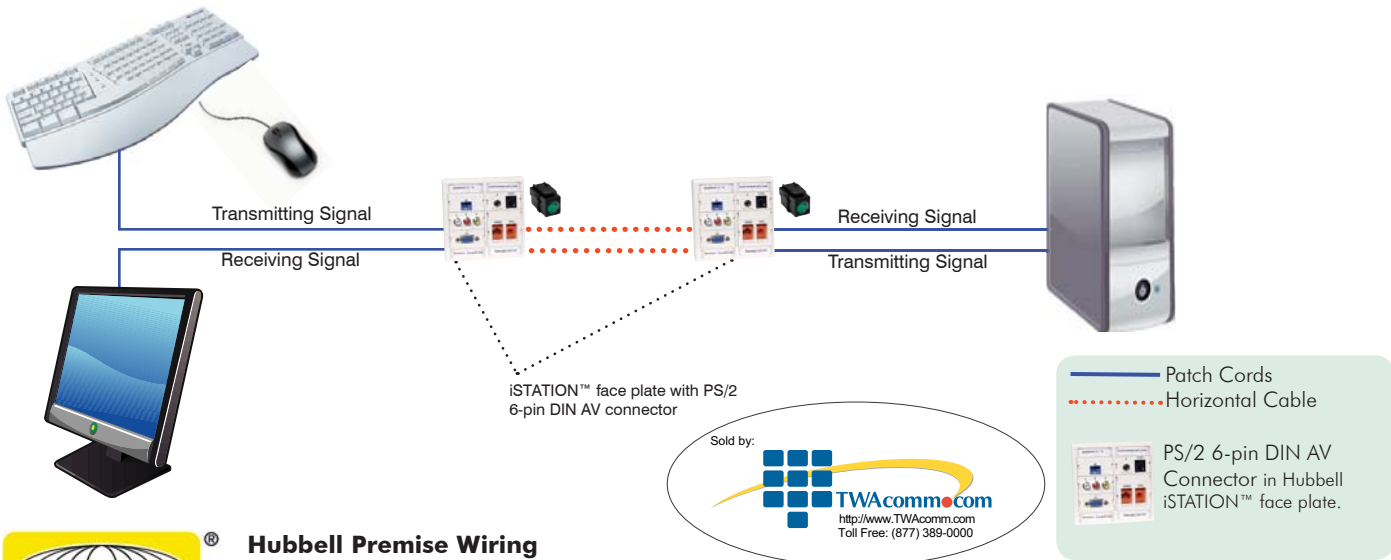

Hubbell Premise Wiring

HUBBELL INCORPORATED (Delaware)
 14 Lord's Hill Road • Stonington, CT 06378-0901 • (860) 535-8326 • 800-626-0005
 Fax: (860) 535-8328 • Internet site: <http://www.hubbell-premise.com>

Worldwide Locations

Hubbell Premise Wiring, Asia Pacific
 Hubbell Canada Inc.
 Hubbell Premise Wiring, Central America
 Hubbell Premise Wiring, China
 Hubbell Premise Wiring, Europe
 Hubbell Premise Wiring, India
 Hubbell Int'l. Inc., Korea Branch

852-2836-7131
 905-839-1138
 506-309-4158
 86-21-6374 2660
 44-01283 500500
 91-80-4022-4089
 (82 2) 2607 1363

Fax: 852-2836-7132
 Fax: 905-839-9108
 Fax: 506-260-1616
 Fax: 86-21-6374 2799
 Fax: 44-01283 500400
 Fax: 91-80-4022-4033
 Fax: (82 2) 2603 7386

Hubbell Premise Wiring, Latin America
 Hubbell de Mexico, S.A. de C.V.
 Hubbell Premise Wiring, Middle East
 Hubbell Premise Wiring, Puerto Rico
 Hubbell-Taian Co., Ltd., Taiwan
 Hubbell Premise Wiring, Venezuela

305-408-4501
 (5255) 9151-9999
 971-4-393-4192
 787-855-1075
 886-2-2522-1862
 58-212-5156482

Fax: 305-408-8201
 Fax: (5255) 9151-9989
 Fax: 971-4-393-4194
 Fax: 787-855-3265
 Fax: 886-2-2522-1872
 Fax: 58-212-6627258