



- Glass fiber Reinforced Plastic laminate construction
- Suitable for use with GAI-Tronics telephones and Page Party equipment
- 23dB Mean noise reduction
- Polypropylene interior
- 2" acoustic lining panels
- Internal gear plate for ease of equipment mounting
- Up to 132lbs (60kgs) of equipment can be carried
- Detachable internal shelf
- External mounting straps
- Fire retardant



DAC Telephony

Industrial Acoustic Hood - 23dB Accessories

TECHNICAL SPECIFICATIONS

Body Material

Main Body and Detachable Shelf:

General purpose resin continuous filament MAT

Acoustic Damping:

Insulation - Rockwool RW3, Density 60kg/m3 (50mm)

Acoustic Facing:

Internal Lining - White perforated PPC, 3mm thickness.

Fire Resistance:

BS476 Part 7 Fire Retardant Classification of 1

Telephone Mounting Plate:

988-60-0002-20* - 316 (Marine) Grade Stainless Steel

Mounting Straps:

988-60-0002-20* - 316 Stainless Steel

Colour:

Yellow or red as standard. Other options available

Weight:

Approx 55lbs (25 kg)




DIMENSIONS

- **H 36 ¼" x W 27" x D 23 ½"**
(H 920mm x W 690mm x D 600mm)
- **Fixing: W 29 ¼" x H 22 ½"**
(W 740mm x H 575mm)

ORDER INFORMATION

	Mounting Plate: Stainless Steel (316)	Mounting Straps: Stainless Steel (316)	Internal Shelf
988-60-0002-20*	✓	✓	✓

*color	yellow	red	blue	grey	orange
	1	2	3	4	5

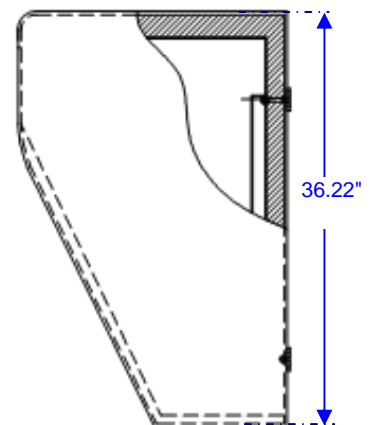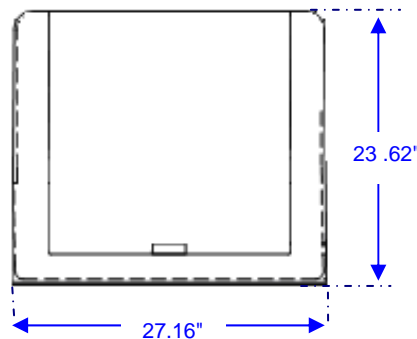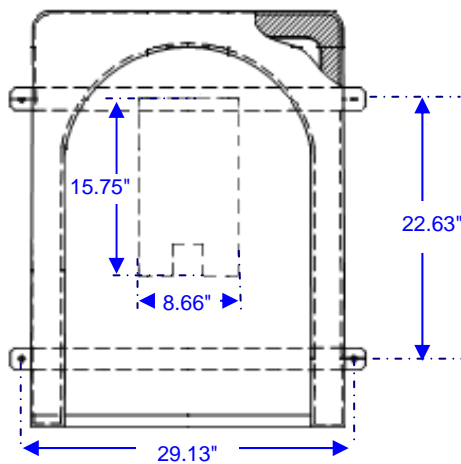

Pub. 070702



GAI-Tronics® - USA (Corporate) Toll Free: 1 (800) 492-1212 Tel: (610) 777-1374 Fax: (610) 796-5954 www.gai-tronics.com
 GAI-Tronics® UK Tel: +44 (0)1283 500500 Fax: +44 (0)1283 500400 www.gai-tronics.co.uk
 GAI-Tronics® S.r.l - Italy Tel: +39 02 48601 460 Fax: +39 02 4585 625 www.gai-tronics.it
 GAI-Tronics® - Malaysia Tel: +60-3-8945-4035 / 8945-7348 Fax: +60-3-8945-4675 www.gai-tronics.com
 GAI-Tronics® Austdac - Australia Tel: 011-61-28-851-5000 Fax: 011-61-29-899-2490 www.austdac.com.au

Quality Management Systems Certified - ISO9001:2000

The policy of GAI-Tronics is one of continuous improvement; therefore the company reserves the right to change specifications without notice.