

SSW-323-SERIES

Stainless Steel, Vandal Resistant, Rugged Telephones Built to Last

The SSW-323 series telephones are designed for customers in need of CEECO's reliable, industrial quality phones with advanced capability. These vandal resistant phones go beyond standard telephone functionality by providing you with smart features to fit all of your courtesy, security, emergency, and public phone applications. Each unit contains a marine quality chrome keypad and hookswitch, armored cord handset with internal steel lanyard and swivel for added strength, tamper resistant screws, and mounting back plate for easy installation.

FEATURES:

- Implement call restrictions
- Automatically dial one or two numbers when the handset is lifted, i.e., PBX or other access numbers
- Speed-dial pre-programmed numbers
- Select the width of the dial tone detection window
- Block or allow incoming calls
- Exception Allow Table
- Mute the microphone to guard against fraud
- Automatically time and disconnect a phone call



FEATURES

Measurements: 5"W x 10 3/4"H x 5 1/2"D (on hook)

Stainless Steel Construction with Tamper Resistant Hardware

Marine Quality Chrome Tone Dial, Swivel, and Hookswitch

Equipped with ADT 1.03, SPD 6.00, OR SPD 2.01 Firmware

Smart Phone Feature details listed on back

Line Powered

Microprocessor based telephone


Armored cord handsets with internal steel lanyard and swivel

Requires 301-037 Security Tool



SPECIFICATIONS

INPUT POWER:	C.O. Line Powered or PBX
LOOP CURRENT:	23mA min to 80mA max.
IMPEDANCE:	600 ohms
SIGNALING:	Rotary (pulse dialing)
OUTPUT:	10 PPS or 20
HEARING AID	
COMPATIBLE:	Meets EIA standards
ENVIRONMENTAL:	Temperature: -30°C (-22°F) to 60°C (140°F) Humidity 0%-90% non-condensating
PROGRAMMING:	Via unit keypad
RINGER EQUIVALENCY:	0.8A
TYPE JACK:	RJ11C
TELEPHONE COVER:	Brushed 16 ga. Stainless Steel
DIMENSIONS:	5" Wide x 10 3/4" High x 5.1/2" Deep (handset on-hook)
MOUNTING:	Vertical surface mount
MEMORY RETENTION:	Lithium battery, long life
WEIGHT:	7 lbs.
UL LISTED NO.:	60F5
<u>ACCESSORIES:</u>	
301-037	Security Tool (required for installation)

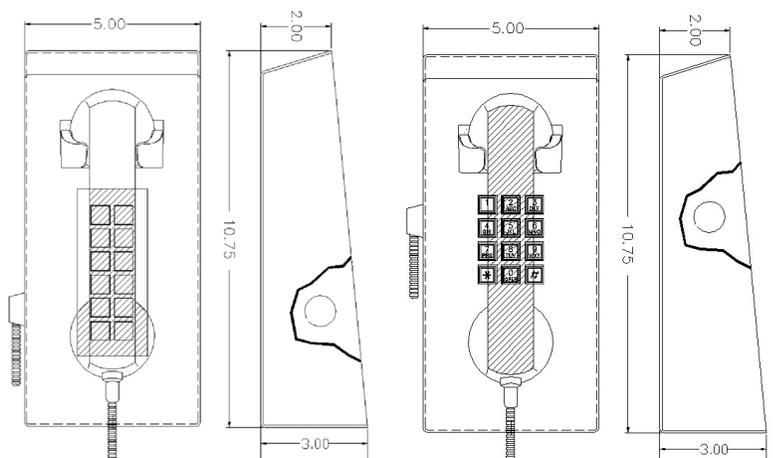

SSW-323-E

SSW-323-F

Providing Telecommunication Solutions Since 1930

Communication Equipment
& Engineering Company

Web: www.ceeco.net

Email: sales@ceeco.net

519 SW Park Street
Okeechobee, FL 34972

Voice 863-357-0798

Fax 863-357-0006

SSW-323-SERIES

PRODUCT MANUALS WITH FULL FEATURES AND FUNCTIONS AVAILABLE UPON REQUEST



SSW-323-E (ADT 1.03)

Microprocessor based telephone equipped with **ADT 1.03 FIRMWARE**. Keypad with two rows of six buttons, each programmed to dial a single number up to 23 digits in length. Label has an area provided to list call destinations next to relevant buttons. The transmitter stays muted (off) during periods of dial tone to deter the use of hand held dialers and hookswitch dialing. Attempts to make fraudulent calls are detected and blocked, causing the microprocessor to reset. Incoming calls may be allowed or blocked.



SSW-323-F-IVC (CAC 6.00)

Microprocessor based coinless telephone equipped with **CAC 6.00 FIRMWARE** is designed to withstand abuse and fraudulent call attempts while implementing call control. Microphone is muted to guard against fraud as well as select options for tone (DTMF) or pulse dialing. Call restriction features include: allowing or blocking incoming calls, speed dialing up to 40 pre-programmed numbers, automatically dialing one or two numbers when the handset is lifted (PBX or access number), and call blocking, for example, long distance calling and/or limiting call time duration.



SSW-323-F-M (SPD 2.01)

Microprocessor based telephone equipped with **SPD 2.01 FIRMWARE** is a speed dial telephone only. Designed to speed dial ninety-three (93) speed dial numbers from one (1) to eleven (11) digits in length. Telephone will not dial any other number except for the preprogrammed speed dial numbers. Incoming calls are not allowed and will be blocked. Speed dial numbers are programmed via the keypad and additional speed dial numbers may be added, deleted, or changed at any time.

***Other softwares and features available, call for details. Customization is our specialty!**

Dimensions:
5"W x 10 3/4"H x 5 1/2"D
Weight: 7lbs
Product Link: [Click here](#)

Dimensions:
5"W x 10 3/4"H x 5 1/2"D
Weight: 7lbs
Product Link: [Click here](#)

Dimensions:
5"W x 10 3/4"H x 5 1/2"D
Weight: 7lbs
Product Link: [Click here](#)

ADDITIONAL OPTIONS

-M	-IVC	-ACH**	-ACH*	-CCH*	-PBVC	-C	-ADA	-RIL	-RIS
Sealed Magnetic Hookswitch that uses standard handset.	ADA compliant push button volume control and background noise reducer. (Built into phone)	Other Length armored cord from 12" to 72"(inches). Example: -ACH12 12" Long	ACHW -White Handset ACHR -Red Handset (Black is standard)	Coiled cord available from 5', 10', & 15' (feet). Example: -CCH5 5' Long	Pushbutton volume control handset	Background noise reduction in handset	Braille EMERGENCY Plate	Ring Indicator Light	Ring Indicator Flashing Blue Light (Requires AC Power)

IP - Voice over Internet Protocol Version available on all models (SIP)

CUSTOMIZATION - Call us for MORE available options and features

Visit our website at www.ceeco.net or call us at 863-357-0798 for detail specifications on any of our models.

CEECO has been providing telecom solutions since 1930. Our vandal resistant technology focuses on providing public communication solutions while reducing replacement and repair costs, lowering the customer's total cost of ownership. CEECO also offers custom design and branding to your specifications. Our commitment to providing expert service and support extends beyond the warranty of our product. We offer support for the life of the product! CEECO is devoted to giving you the quality and service you deserve.



Providing Telecommunication Solutions Since 1930

Communication Equipment
& Engineering Company
Web: www.ceeco.net
Email: sales@ceeco.net

519 SW Park Street
Okeechobee, FL 34972
Voice 863-357-0798
Fax 863-357-0006