

# **Server Cabinets**

**Rugged** Construction **Engineered** Cooling Locking Front/Rear Doors



#### **FEATURES**

- Arrives on site fully assembled and ready to use - Simply unpack, roll down provided ramp, and position in place
- 34" internal depth accommodates deep server chassis (rails pre-set at 29.2" to accommodate standard server mounting brackets)
- Rolls through a standard 7' doorway (79.5"H) without compromising internal usable space
- Door easily reversed from right to left-hand hinged on site

### **SPECIFICATIONS**

- Front and rear 19" mounting rails: yellow zinc-plated
- Cable opening in frame bottom: 11" (300) x 29.2" (742)
- Internal equipment mounting per EIA-310-D universal hole spacing - 9.2mm square holes allowing the use of M6 cage nuts
- Packaging requirements to Telcordia<sup>™</sup> **GR63-CORE** specifications
- 1000 lb. static weight load capacity

cable entry/egress facilities

Doors and sides easily removed simplifying installation of equipment

Hubbell Premise Wiring's Server Cabinets provide a secure, reliable housing for critical network equipment.

The unique honeycomb ventilation pattern, which covers the front and rear doors, and top, provides a high degree of open ventilation area while complementing the appearance of every data-center.

A wide range of accessories complements the SVR cabinets and can be used to adapt the cabinet to various applications. The mounting depth of the SVR series cabinets accommodates servers, UPSs, storage devices, and other network equipment from all major manufacturers.



## HUBBELL PREMISE WIRING

DEI	IVERY	
Qty.	Description	Material
1	Lightweight, heavy duty frame	Aluminum
4	Front/rear steel server mounting rails	16 ga Steel
1	Ventilated window door	16 ga Steel
		acrylic window
1	Ventilated rear door	16 ga Steel
1	Caster base	11 ga Steel
4	Pre-assembled casters (4 swivel, non-locking)	
4	Adjustable feet (4 in forward outermost position)	Steel
2	Side covers secured with 1/4-turn	16 ga Steel
	fasteners	
1	Ventilated top cover with 2 cable	16 ga Steel
	entry openings in rear	
2	Anti-tip angles	16ga Steel
50	M6 x 12 screws	
50	Plastic washers	
50	Cage nuts, M6	
1	Cage nut insertion tool	

#### ORDER INFORMATION

### **Server Cabinets**


Rack	Usable					
units	Height	Height	Width	Depth	Color	Catalog No.
42	73.5″	79.5″	23.5″	35″	Black	SVR84
42	73.5″	79.5″	23.5″	35″	Blue	SVR84B
42	73.5″	79.5″	23.5″	35″	Tan	SVR84T
42	73.5″	79.5″	23.5″	35″	Office White	SVR84W

#### **Server Cabinets without Side Covers**

**Server Cabinet Accessories** 

42	73.5″	79.5″	23.5″	35″	Black	SVR84LS
42	73.5″	79.5″	23.5″	35″	Blue	SVR84LSB
42	73.5″	79.5″	23.5″	35″	Tan	SVR84LST
42	73.5″	79.5″	23.5″	35″	Office White	SVR84LSW

### DIMENSIONS

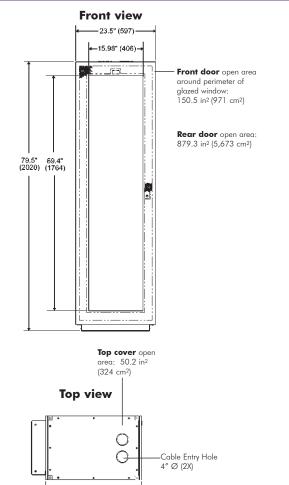



# **Hubbell Premise Wiring**

HUBBELL INCORPORATED (Delaware) 14 Lord's Hill Road • Stonington, CT 06378-0901 • (860) 535-8326 • 800-626-0005 Fax: (860) 535-8328 • Internet site: http://www.hubbell-premise.com

#### **Worldwide Locations**

35" (898)

Hubbell Premise Wiring, Asia Pacific Hubbell Canada Inc. Hubbell Premise Wiring, China Hubbell Premise Wiring, Europe Hubbell Int'l. Inc., Korea Branch Hubbell Premise Wiring, Latin America

852-2836-7131 Fax: 852-2836-7132 905-839-1138 Fax: 905-839-9108 8621-6309-0119 Fax: 8621-6309-0122 44-(0)1234-848550 Fax: 44-(0)1234-856190 82-2-(0)2607-1363 Fax: 82-2-(0)2603-7386 305-251-4236 Fax: 305-251-4087

Hubbell de Mexico, S.A. de C.V. Hubbell Premise Wiring, Middle East Hubbell Premise Wiring, Puerto Rico Hubbell-Taian Co., Ltd., Taiwan Hubbell Incorporated, Turkey Hubbell Premise Wiring, Venezuela

52-5-559-5304 971-4-393-4192 787-720-7185 886-2-(0)2515-0855 90-216-414-8147 58-16-6807453

Fax: 52-5-559-5885 Fax: 971-4-393-4194 Fax: 787-789-2796 Fax: 886-2-(0)2515-0899 Fax: 90-216-414-8148 Fax: 58-281-2820323

Bag of 100 each: Ma M6 washers	ó cage nuts, M6 screws,
Cataloa No.	CKM6



DS-M11 08/03

SERVER CABINETS

copic slide ra	ıls, 2	tront	n	າວເ	Intir
ear mounting	brac	ckets,	1	kit	har

Depth: 29.2"; Width: 1	6.5";
Load capacity: 200 lbs.	
Delivery: 1 shelf pre-as	sembled with slides
2 kits mounting hardwar	re
Catalog No.	CKTSD

Depth: 28.2″/Widtl	n: 16.9″
Load capacity: 200	lbs.
Delivery: 1 shelf, 2	brackets, 3 mounting screws
Catalog. No.	CKSSD

#### **Fan Tray**

Black	SVRFT	
Color	Catalog No.	
NEMA5-15P, 1 kit mounting hardware		
4 100CFM fans, 10' line cord terminated with		
Delivery: (pre-assembled)		

### **Mounting Hardware**

Catalog No.	СКМ6
M6 washers	
Bag of 100 each: M6 cage	nuts, M6 screws,



Load Capacity: 75 lbs.	
Dimensions: Overall 16.5"	x 14″
Keyboard pocket: 15.9″ x 7	7.6″
Catalog No.	HPWKD1
Talaasanis Chalf	

**Telescopic Shelf** 

9

# **Stationary Shelf**

Depth: 28.2″/Width: 16.9″		
Load capacity: 200 lbs.		
Delivery: 1 shelf, 2 brackets, 3 mounting screws		
Catalog. No. CKSSD		