
Long Twin Tube with 2G11 Base



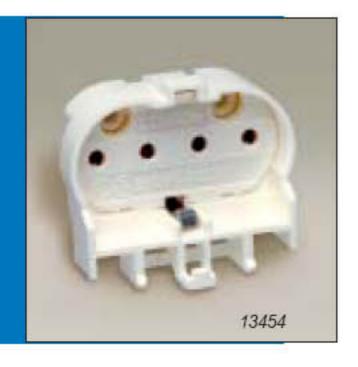

4-Pin Long Twin-Tube with 2G11 Base — Slide-In Mounting

DESCRIPTION	CAT. NO.	RATING
Slide-In for 18-20 Ga. Panels, Quickwire Terminals	13452	660W 600V
Plastic Lamp Support clip, Slide-On	23452-A	f <u></u> é
Plastic Lamp Support clip, Screw Mount	23452-B	19

4-Pin Long Twin-Tube with 2G11 Base — Bottom or Back Mounting

	3	
DESCRIPTION	CAT. NO.	RATING
Vertical Snap-In Mounting, Side Push-In Wiring	13453	660W 600V
Same as above, with Internal Shunt Connection for Electronic Ballasts	23453	660W 600V
Horizontal Snap-In Mounting, Bottom Push-In Wiring	13454	660W 600V
Same as above, with Internal Shunt Connection for Electronic Ballasts	23454	660W 600V
Horizontal Screw-Mount. Bottom Push-In Wiring	13455	660W 600V
Same as above, with Internal Shunt Connection for Electronic Ballasts	23455	660W 600V
Horizontal Snap-In Lamp Support Clip. UV-Stable, Clear Polycarbonate	23452-H	is i
Vertical Snap-In Lamp Support Clip. UV-Stable, Clear Polycarbonate	23452-V	2
THE CONTRACT OF THE CONTRACT O		

All devices are UL Listed and CSA Certified.


SPECIFICATIONS & FEATURES


- Vertical Snap-In model allows wires to be routed on either top or bottom of panel
- Two wiring ports per contact speed harness wiring
- Internal Shunt models eliminate need for extra jumper wire in fixtures designed for electronic ballasts
- Low-profile design for smaller, more compact fixtures
- · Superior metal-spring lamp retainer clips


TESTING & CODE COMPLIANCE

- UL Listed (File #E-5833)
- CSA Certified (File #LR-1863)
- NOM Certified (File #057)


13453 and 23454

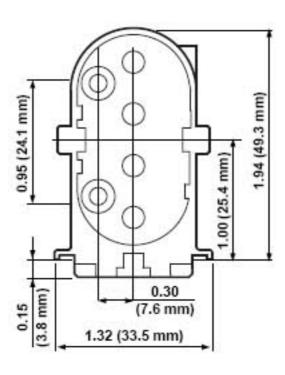

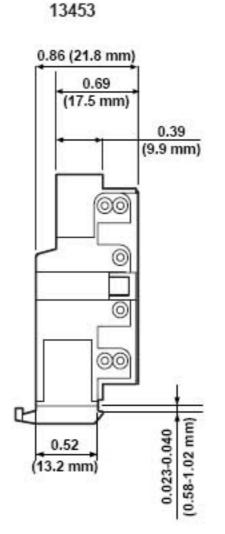

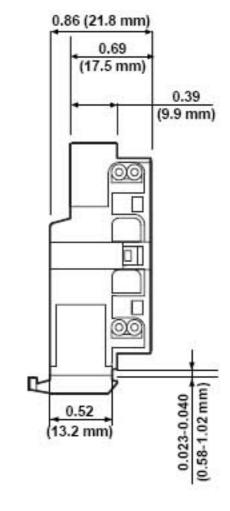

23453



SUGGESTED PANEL CUTOUT PANEL-THICKNESS .023-.039 (0.58-0.99 mm) MAX. INCLUDING PAINT

Cat Nos. 13453 and 23454

