

Vandal Resistant, Stainless Steel, Panel Telephone

The **K-1500-7** is a vandal resistant, flush mount, stainless steel, panel telephone. The **K-1500-7** works ideally with **Viking's DLE-200B** line simulator or on a dedicated Ringdown circuit. If dialing is necessary use **Viking's K-1900-7** or pair the **K-1500-7** with one of **Viking's** Hot-Line dialers.

The **K-1500-7** consists of a heavy gauge stainless steel panel, an armored cable, a heavy duty handset, and an all metal cradle. The entire assembly is designed to mount to a standard double gang electrical box or can be surface mounted with the optional **VE-5x10** weather resistant backbox (**Fax Back Document 424**).

An optional **Q170600** Ringer is also available (**Fax Back Document 845**).


Features

- Operates on C.O. lines or analog PABX/KSU stations
- Flush mountable to a standard double gang box
- Optional **Q170600** Ringer (**Fax Back Document 845**)
- Optional **VE-5x10** surface mount box (**Fax Back Document 424**)

Installation

A. Double Gang Box

The **K-1500-7** is designed to be flush mounted to a standard double gang box (not included). Connect tip & ring to the modular RJ11 jack.

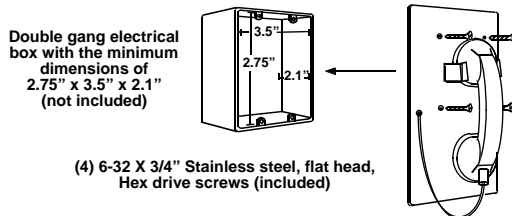

Applications

- Ringdown phones
- Catalog sales
- Kiosks in malls
- Courtesy and customer service phones
- Automated tellers
- Hot-Line phone when paired with one of **Viking's** Hot-Line dialers
- Point to point communication when used with the **DLE-200B** Line Simulator
- Security and emergency phones

Sales...(715) 386 - 8861

Specifications

- Power:** Telephone line powered
- Dimensions:** 127mm x 254mm x 102mm (5" x 10" x 4")
- Shipping Weight:** 1.8 kg (4 lbs)
- Environmental:** 0°C to 32°C (32°F to 90°F) with 5% to 95% non-condensing humidity
- Connections:** (1) RJ11 jack
- Panel Material:** .125 inch stainless steel
- Mounting:** Flush mountable to a standard double gang box

Product Support Line...(715) 386-8666

Fax Back Line...(715) 386-4345

Due to the dynamic nature of the product design, the information contained in this document is subject to change without notice. Viking Electronics, its affiliates and/or subsidiaries assume no responsibility for errors and/or omissions contained in this information. Revisions of this document or new editions of it may be issued to incorporate such changes.