



RCS-20



RCS-10



190



U407



PDT-66/110



PDB-66


PDB-110/88



WS4



WS5

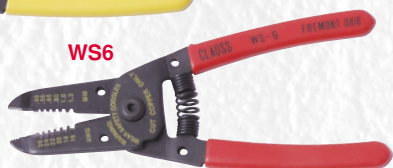

WS6



WS7



CS8

Caution:
Cut copper only. Never use any
pliers or cutters on live electrical circuits.

ROTARY CABLE STRIPPERS

- No. RCS-20 designed for cable with outer diameters from 4mm to approximately 25mm. Extra blade in casing. Incision depth can be regulated with simple turn of knurled screw. Length-wise slit requires only a turn of the lever. Spring-loaded support pushes cable onto the knife.
- No. RCS-10 is designed for cable with outer diameters from 8mm to approximately 35mm.
- Replacement blades are available for both tools.

WIRE CUTTERS

- No. 190 micro-sized cutter has premium quality steel jaws that hold their edge. Soft cushion grips are easy on the hands and reduce fatigue from repetitive cutting.
- No. U407 has specially designed, superior hardened edges for problem-free wire cutting. Slices through the toughest wire, even non-uniform grades of drawn steel.

PUNCHDOWN TOOL

- No. PDT-66/110 is designed to terminate wires on 110/88 or 66-type connecting blocks.
- Adjustable impact.
- Hardened steel interchangeable blades cut off excess wire.
- No screwdriver needed to change blades or adjust spring tension.
- Sure-lock blade holder provides fast, easy blade changes and prevents pull-out during operation.
- Replacement blades available for 66-type and 110/88-type blocks. Blade storage in handle.
- Tool also available without blades as No. PDT-1.

WIRE STRIPPERS

- No. WS4 is a universal stripping tool that cuts and strips common wire sizes from #10 to #22. Hardened blades. Vinyl grips. Spring action.
- Nos. WS5, WS6, and WS7 strip and cut commonly used wire, single or stranded, AWG or metric. Each tool will strip several different wire sizes. Plier nose at tip an extra feature, along with cushioned grips and spring release. Hardened pivot joint for longer life. A perfect tool for solder benches or assembly areas. WS5 for AWG 10 thru 20. WS6 for AWG 16 thru 26. WS7 for AWG 22 thru 30.
- No. CS8 five tools in one:
 - Groove grip plier nose at tip.
 - Strips AWG 10 to AWG 22 wire.
 - Complete selection of crimp stations.
 - Threaded bolt cutter for 6 popular-sized bolts.
 - Bypass scissors action for cleaner cut.
 - Vinyl coated handles.

STOCK NO.	FULL LENGTH	LENGTH OF CUT				
RCS-20	5 1/2" - 140mm	N/A				
RCS-20B	N/A	N/A				
Replacement blades						
RCS-10	5 1/4" - 133mm	N/A				
RCS-10B	N/A	N/A				
Replacement blades						
190	5 3/4" - 146mm	1/4" - 6mm	•	•		
U407	7" - 178mm	3/4" - 19mm	•	•		
PDT-66/110	5 3/4" - 146mm	N/A				
With 66-type and 110/88-type blades						
PDT-1	5 3/4" - 146mm	N/A				
With no blades						
PDB-66	2 1/4" - 57mm	N/A				
Blade for 66-type blocks						
PDB-110/88	2 1/4" - 57mm	N/A				
Blade for 110/88-type blocks						
WS4	4" - 102mm	N/A	•	•		
WS5	6" - 152mm	N/A	•	•		
WS6	6" - 152mm	N/A	•	•		
WS7	6" - 152mm	N/A	•	•		
CS8	8 1/4" - 210mm	N/A	•	•		