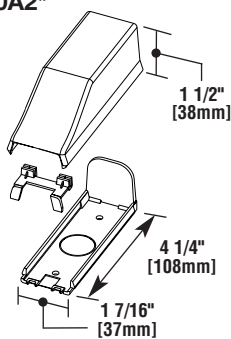


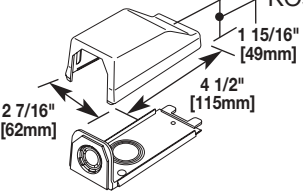


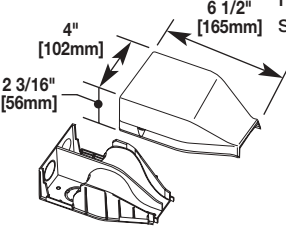
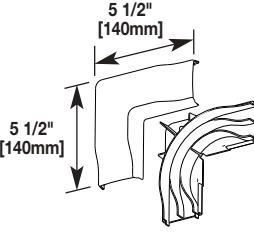
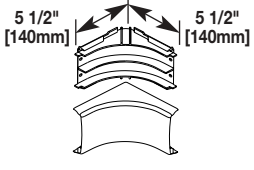
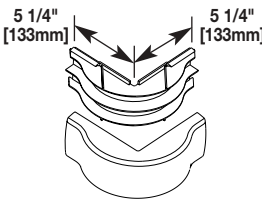
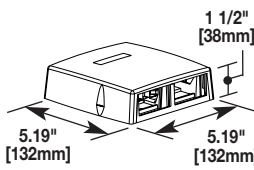
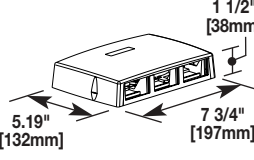


## 400, 800, 2300 Surface Nonmetallic Raceway Fittings

Catalog No./Item	Description/Specifications
<b>810A2*</b> 	<b>Entrance End Fitting</b> – For feeding 400 or 800 Raceway with 1/2" trade size conduit or armored cable.
<b>889A*</b> 	<b>End Reducing Connector</b> – For transition from 800 to 400 Raceway.
<b>5474*</b> 	<b>Transition Tap Fitting</b> – Makes transition from 5400 Raceway to the 400/800/2300 Series Raceway.
<b>2310A*</b> 	<b>Entrance End Fitting</b> – 1/2", 3/4", and 1" trade size KOs for feeding 2300 Raceway.
<b>2389*</b> 	<b>End Reducing Connector</b> – For transition from 2300 to 800 Raceway.
<b>2389A*</b> 	<b>End Reducing Connector</b> – For transition from 2300 to 400 Raceway.
<b>2310DFO*</b> 	<b>Divided Entrance End</b> – FiberReady™ divided fitting to feed 2300 and 2300D Series Raceway. Includes 3/4" trade size KOs on back and top.
<b>2311DFO*</b> 	<b>FiberReady 2" [51mm] Radius Full Capacity Flat Elbow</b> – A 90° flat corner with integral dividers to provide 2" [51mm] cable bend radius for <b>Fiber Optic and Cat. 5/ Cat. 6</b> installations.
<b>2317DFO*</b> 	<b>FiberReady 2" [51mm] Radius Full Capacity Internal Elbow</b> – A 90° internal corner with integral dividers to provide 2" [51mm] cable bend radius for <b>Fiber Optic and Cat. 5/ Cat. 6</b> installations.
<b>2318DFO*</b> 	<b>FiberReady 2" [51mm] Radius Full Capacity External Elbow</b> – A 90° external corner with integral dividers to provide 2" [51mm] cable bend radius for <b>Fiber Optic and Cat. 5/ Cat. 6</b> installations.
<b>CM-MMB-232*</b> 	<b>Multimedia Boxes and Surface Mount Blocks</b> – Two 2A Insert Multimedia Box with fiber storage loop (compatible with 400, 800, and 2300 Series Raceway). <ul style="list-style-type: none"> <li>• Accepts Pass &amp; Seymour Activate Inserts</li> <li>• Accepts Wiremold Open System Communications Modules</li> </ul>
<b>CM-MMB-233*</b> 	<b>Multimedia Boxes and Surface Mount Blocks</b> – Three 2A Insert Multimedia Box with fiber storage loop (compatible with 400, 800, and 2300 Series Raceway). <ul style="list-style-type: none"> <li>• Accepts Pass &amp; Seymour Activate Inserts</li> <li>• Accepts Wiremold Open System Communications Modules</li> </ul>

\*Add "WH" suffix for White finish.

# WIREMOLD

 legrand®

## 400, 800, 2300, 2300D Series Raceway Systems

### 400, 800, 2300, 2300D Surface Nonmetallic Raceway Systems

*For Low Voltage and Power Applications*




The 400, 800, and 2300 Series, from The Wiremold Company, is a family of single compartment raceways for communication or power applications ideal for use in classrooms, office, and hotel applications or anywhere a small low profile raceway is needed. The 2300D Nonmetallic Divided Raceway is for use when power and low voltage cabling is required in the same raceway.


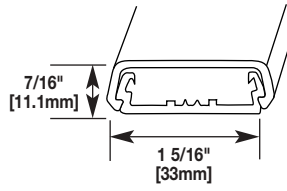
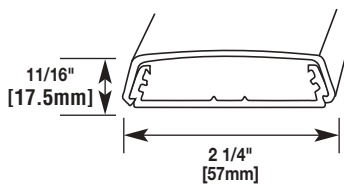
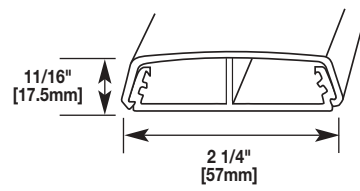


400, 800, 2300, and 2300D








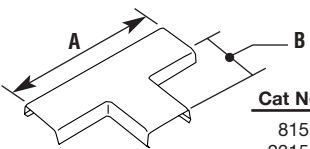
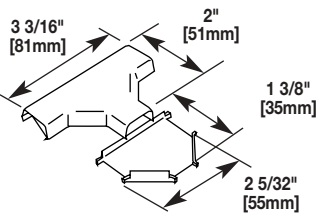

#### Features & Benefits

- **Single and dual compartment low profile raceway design.** Provides functionality and flexibility with aesthetics for single or dual service applications.
- **Over-the-raceway box for 2300 and 2300D.** Boxes mount over continuous run of raceway base eliminating the need to cut raceway when locating devices.
- **Quick Fit™ integral faceplate.** Provides flush look and ease of installation. Eliminates the need for additional commercial faceplates.
- **Durable, textured PVC ivory or white finish.** Blends with walls and ceilings. Consult factory for special colors.
- **Datacom connectivity options.** Accepts industry standard and proprietary devices from a wide range of manufacturers to provide a seamless and aesthetically pleasing interface for voice, data, audio, and video applications at the point of use.
- **Accommodates communication and/or power wiring.** Can be used for communications, computer lines, surveillance systems, fire alarms, outlets, and more.
- **Lightweight and easy to handle.** Saves time and labor costs. Standard 5' [1.525m] lengths can be easily installed by one person. Special lengths up to 10' [3.050m] are available.
- **FiberReady™ divided fittings.** For use with 2300 and 2300D. Full capacity, aesthetically pleasing fittings provide 2" [51mm] bend radius.
- **Snap-on cover.** Provides security with access to wiring for changes or additions.
- **Easy to cut.** Use a hacksaw or shears to cut raceway which speeds installation.
- **Choice of raceway sizes with full line of fittings and accessories.** Facilitates easy installation of wiring for whatever the job requires: communication devices, receptacles, switches, temperature controls, etc.
- **Ratings:** UL 600V (UL5A), CSA 300V (CSA 22.2 No. 62-93).
- 

## Raceway Profiles

Catalog No./Item	Description/Specifications		
400BAC*/800 BAC*/ 2300BAC*/2300BACD*	<b>Base &amp; Cover</b> – Base and cover manufactured of rigid PVC compounds. Cover matte texture. Packed ten 5' [1.5m] lengths per carton.		
<b>400BAC*</b>	<b>800BAC*</b>	<b>2300BAC*</b>	<b>2300BACD*</b>
			

## 400, 800, 2300 Surface Nonmetallic Raceway Fittings

Catalog No./Item	Description/Specifications	Catalog No./Item	Description/Specifications																	
<b>400WC*</b> <b>800WC*</b> <b>2300WC*</b>	<b>Wire Clip</b> – For holding conductors in place.   <table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th>Cat No.</th> <th>A</th> </tr> </thead> <tbody> <tr> <td>400WC</td> <td>3/4" [19.1mm]</td> </tr> <tr> <td>800WC</td> <td>1" [25mm]</td> </tr> <tr> <td>2300WC</td> <td>1" [25mm]</td> </tr> </tbody> </table>	Cat No.	A	400WC	3/4" [19.1mm]	800WC	1" [25mm]	2300WC	1" [25mm]	<b>417*</b>	 <b>Internal Elbow</b> – For surfaces at right angles.  <b>418/818/2318**</b>									
Cat No.	A																			
400WC	3/4" [19.1mm]																			
800WC	1" [25mm]																			
2300WC	1" [25mm]																			
<b>406/806/2306*</b>	<b>Cover Clip</b> – For covering joint of two pieces of 400, 800, or 2300 Cover.   <table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th>Cat No.</th> <th>A</th> </tr> </thead> <tbody> <tr> <td>406</td> <td>13/16" [20.8mm]</td> </tr> <tr> <td>806</td> <td>1" [25mm]</td> </tr> <tr> <td>2306</td> <td>2" [51mm]</td> </tr> </tbody> </table>	Cat No.	A	406	13/16" [20.8mm]	806	1" [25mm]	2306	2" [51mm]	<b>90° External Elbow</b> – For right angle turns around external corners.   <table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th>Cat No.</th> <th>A</th> </tr> </thead> <tbody> <tr> <td>418</td> <td>1 1/2" [38mm]</td> </tr> <tr> <td>818</td> <td>2" [51mm]</td> </tr> <tr> <td>2318</td> <td>2 1/2" [64mm]</td> </tr> </tbody> </table>	Cat No.	A	418	1 1/2" [38mm]	818	2" [51mm]	2318	2 1/2" [64mm]		
Cat No.	A																			
406	13/16" [20.8mm]																			
806	1" [25mm]																			
2306	2" [51mm]																			
Cat No.	A																			
418	1 1/2" [38mm]																			
818	2" [51mm]																			
2318	2 1/2" [64mm]																			
<b>410B/810B/2310B*</b>	<b>Blank End Fitting</b> – For closing end of 400, 800, or 2300 Raceway.   <table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th>Cat No.</th> <th>A</th> <th>B</th> </tr> </thead> <tbody> <tr> <td>410B</td> <td>13/16" [20.6mm]</td> <td>1/2" [12.7mm]</td> </tr> <tr> <td>810B</td> <td>1 1/4" [32mm]</td> <td>1/2" [12.7mm]</td> </tr> <tr> <td>2310B</td> <td>2 1/4" [57mm]</td> <td>1" [25mm]</td> </tr> </tbody> </table>	Cat No.	A	B	410B	13/16" [20.6mm]	1/2" [12.7mm]	810B	1 1/4" [32mm]	1/2" [12.7mm]	2310B	2 1/4" [57mm]	1" [25mm]	<b>90° Flat Elbow</b> – For right angle turns on same surface.   <table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th>Cat No.</th> <th>A</th> </tr> </thead> <tbody> <tr> <td>811</td> <td>2 1/2" [64mm]</td> </tr> <tr> <td>2311</td> <td>4 3/16" [107mm]</td> </tr> </tbody> </table>	Cat No.	A	811	2 1/2" [64mm]	2311	4 3/16" [107mm]
Cat No.	A	B																		
410B	13/16" [20.6mm]	1/2" [12.7mm]																		
810B	1 1/4" [32mm]	1/2" [12.7mm]																		
2310B	2 1/4" [57mm]	1" [25mm]																		
Cat No.	A																			
811	2 1/2" [64mm]																			
2311	4 3/16" [107mm]																			
<b>411*</b>	<b>90° Flat Elbow</b> – For right angle turns on same surface.  	<b>815/2315**</b>	<b>Tee</b> – For branches at right angles.   <table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th>Cat No.</th> <th>A</th> <th>B</th> </tr> </thead> <tbody> <tr> <td>815</td> <td>4 1/8" [105mm]</td> <td>2 3/4" [70mm]</td> </tr> <tr> <td>2315</td> <td>6" [152mm]</td> <td>4 1/8" [105mm]</td> </tr> </tbody> </table>	Cat No.	A	B	815	4 1/8" [105mm]	2 3/4" [70mm]	2315	6" [152mm]	4 1/8" [105mm]								
Cat No.	A	B																		
815	4 1/8" [105mm]	2 3/4" [70mm]																		
2315	6" [152mm]	4 1/8" [105mm]																		
<b>415*</b>	<b>Tee</b> – For branches at right angles.  	<b>817/2317*</b>	<b>Internal Elbow</b> – For surfaces at right angles.   <table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th>Cat No.</th> <th>A</th> </tr> </thead> <tbody> <tr> <td>817</td> <td>2" [51mm]</td> </tr> <tr> <td>2317</td> <td>2 1/2" [64mm]</td> </tr> </tbody> </table>	Cat No.	A	817	2" [51mm]	2317	2 1/2" [64mm]											
Cat No.	A																			
817	2" [51mm]																			
2317	2 1/2" [64mm]																			

\* Add "WH" suffix for White finish.

\*\* For 2300BCD and 2300BACD Raceway must be mitered to use 2311 and 2318. 2315 cannot be used in divided raceway.