




## G-Tel Inmate Phone Model# JP-3500 Armored Analog

### Features:

- Constructed of durable 14-gauge stainless steel
  - Built in mounting plate designed for fast, easy installation
  - Mounting plate includes gasket which prevents moisture from entering phone
  - Oversized line-wire entrance hole w/ moisture preventing gasket
  - Mounts directly to the wall or installs inside a hood/enclosure
  - Tamper resistant locking system
  - Oversized stainless steel ADA keypad
  - Adjustable volume button for full ADA compliance
  - Magnetic, sealed Hookswitch
  - Armored handset cord, with internal lanyard, is made to Bell Core standards and withstands minimum 1000 lb pulling test
- Handset cord retaining bracket is designed for fast, easy handset changes
  - Stainless steel grommet provides added security for the handset cord
  - Adjustable handset cord lengths, comes standard with 24" Handset length
  - Optional noise-canceling microphone available
  - Large customizable instruction card area

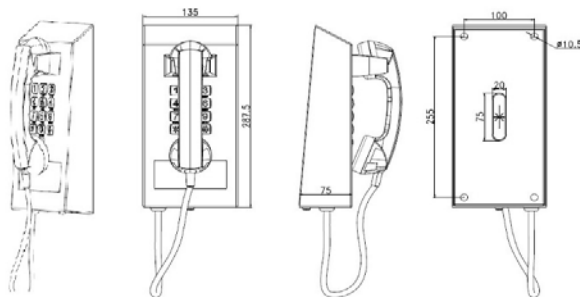

### G-Tel JP-3500 Technical Parameters:

Protection Class: **IP54**  
 Ambient Temperature:  
     -40 °C ~ + 60 °C  
     -40 F ~ + 140 F  
 Relative Humidity: ≤95%  
     (at room temperature)  
 Atmospheric Pressure:  
     80 ~ 110KPa  
 Frequency Response:  
     250 ~ 3000 Hz  
 Supply Voltage: 48 ~ 60V  
 Feed Current: 25mA  
 Call Transfer Index:  
     SLR≤12 dB,  
     RLR≤-1dB,  
     STMR≥10dB  
 Environmental Noise: ≤70dB  
 Ringing level: ≥80dB

Operates on C.O., analog  
 lines or analog dialtone  
 PABX/KSU stations

Dimensions:  
     11¼" tall, 5¼" wide, 6" deep  
     287.5×135×75mm  
 Weight: 9lbs, 3KG