


## Opt-X® Fiber Adapter Plates — Precision Molded

### APPLICATION

Leviton Opt-X fiber adapter plates are used in conjunction with Opt-X panels or enclosures (rack- or wall-mount) to provide a means to connect backbone to backbone or backbone to horizontal fiber cabling. The Opt-X fiber adapter plates are offered in LC, SC, and ST versions.

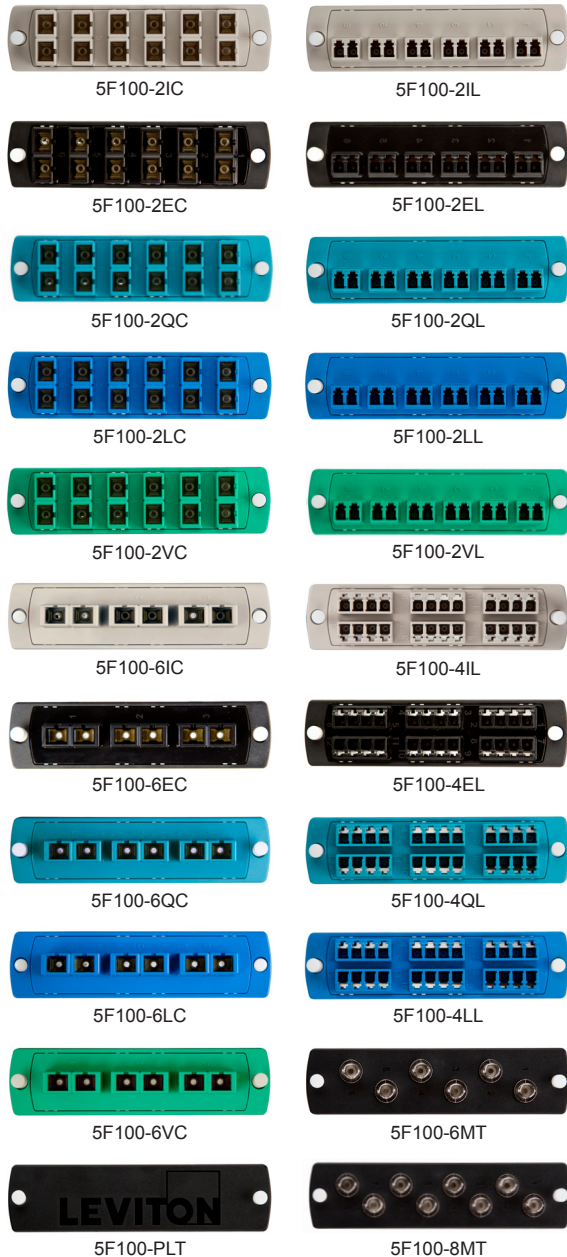

### SPECIFICATION

The Opt-X adapter plate shall be modular and functional for use in an Opt-X panel or enclosure (rack- or wall-mount). The adapter plate shall be offered in LC, SC, and ST styles in 6, 12, or 24 fiber configurations. The adapter plate shall be compliant to ANSI/TIA-568-C.3 (for performance) and respective ANSI/TIA-604-X (for intermateability) standards. Adapter plates shall use zirconia ceramic sleeves and be offered in standard fiber type colors pursuant to ANSI/TIA-568-C.3 standards. The adapter and plate shall be integrated to eliminate “rattle” and loose fit. Adapter plates shall be made in the United States of America.

### FEATURES

- Integrated LC and SC plates (two pieces) eliminates rattling and loose fit
- Adapter plates use zirconia ceramic sleeves for optimal performance in 1 Gbps and higher transmission speeds
- LC and SC plates offered in standard fiber type colors
- Adapter plates offered in LC, SC, ST, and blank styles
- Captive push-lock pins allow for quick tool-less installation
- Compatible with all Opt-X panels and enclosures (rack- or wall-mount)

### DESIGN CONSIDERATIONS

- Arrange adapter plates within panel or enclosure to allow for future growth
- Colored plate or fiber adapters will identify fiber type used
- Visible sequential numbering to identify ports (for Tx & Rv)
- 4RU rack-mount enclosure accommodates up to 15 adapter plates for highest density per RU
- Zirconia ceramic sleeve typically used on laser optimized multimode and single-mode applications (OM3, OM4, OS2)

### STANDARDS COMPLIANCE

- Meets ANSI/TIA-568-C.3 for performance requirements
- Meets ANSI/TIA-604-2B (ST), -3B (SC), -10B (LC) for connector intermateability

### PHYSICAL SPECIFICATIONS

Materials: Adapter plate: constructed of engineered polymer, various pantone colors

### COUNTRY OF ORIGIN

USA

### WARRANTY INFORMATION

For a copy of Leviton product warranties, visit [www.leviton.com/warranty](http://www.leviton.com/warranty).

5F100-xxx (precision molded)

<b>Leviton Network Solutions</b> 2222 - 222nd St. SE Bothell, WA 98021-4416  tel 1-800-824-3005 tel +1-425-486-2222 appeng@leviton.com www.leviton.com	<b>Asia / Pacific</b> T +1.631.812.6228 E infoasean@leviton.com	<b>Canada</b> T +1.514.954.1840 E pcservice@leviton.com	<b>Caribbean</b> T +1.954.593.1896 E infocaribbean@leviton.com	<b>China</b> T +852.2774.9876 E infochina@leviton.com	<b>Colombia</b> T +57.1.743.6045 E infocolombia@leviton.com
	<b>Europe</b> T +33.6.8869.1380 E infoeurope@leviton.com	<b>India / SAARC</b> T +91.80.4322.5678 E infoindia@leviton.com	<b>Mexico</b> T +52.55.5082.1040 E lsamarketing@leviton.com	<b>Middle East &amp; Africa</b> T +971.4.886.4722 E lmeinfo@leviton.com	<b>South Korea</b> T +82.2.3273.9963 E infokorea@leviton.com

**PRODUCT SPECIFICATIONS**  
**5F100-xxx (precision molded)**




**ELECTRONIC FILES**


For CAD files, typical specs, or dimensional line art (.DXF, .DWG, Visio), visit [www.leviton.com](http://www.leviton.com).

**PART NUMBERS**


Description	Part No.
Plate (beige), 62.5 µm MM (OM1), Duplex LC, 12-fiber, zirconia ceramic sleeve	5F100-2IL
Plate (black), 50 µm MM (OM2), Duplex LC, 12-fiber, zirconia ceramic sleeve	5F100-2EL
Plate (aqua), 50 µm LOMM (OM3 & OM4), Duplex LC, 12-fiber, zirconia ceramic sleeve	5F100-2QL
Plate (blue), SM (OS1 & OS2), Duplex LC, 12-fiber, zirconia ceramic sleeve	5F100-2LL
Plate (green), SM/APC (OS1 & OS2), Duplex LC, 12-fiber, zirconia ceramic sleeve	5F100-2VL
Plate (beige), 62.5 µm MM (OM1), Quad LC, 24-fiber, zirconia ceramic sleeve	5F100-4IL
Plate (black), 50 µm MM (OM2), Quad LC, 24-fiber, zirconia ceramic sleeve	5F100-4EL
Plate (aqua), 50 µm LOMM (OM3 & OM4), Quad LC, 24-fiber, zirconia ceramic sleeve	5F100-4QL
Plate (blue), SM (OS1 & OS2), Quad LC, 24-fiber, zirconia ceramic sleeve	5F100-4LL
Plates (beige), 62.5 µm MM (OM1), Duplex SC, 6-fiber, zirconia ceramic sleeve	5F100-6IC
Plates (black), 50 µm MM (OM2), Duplex SC, 6-fiber, zirconia ceramic sleeve	5F100-6EC
Plates (aqua), 50 µm MM (OM3 & OM4), Duplex SC, 6-fiber, zirconia ceramic sleeve	5F100-6QC
Plates (blue), SM (OS1 & OS2), Duplex SC, 6-fiber, zirconia ceramic sleeve	5F100-6LC
Plates (green), SM/APC (OS1 & OS2), Duplex SC, 6-fiber, zirconia ceramic sleeve	5F100-6VC
Plate (beige), 62.5 µm MM (OM1), Duplex SC, 12-fiber, zirconia ceramic sleeve	5F100-2IC
Plate (black), 50 µm MM (OM2), Duplex SC, 12-fiber, zirconia ceramic sleeve	5F100-2EC
Plate (aqua), 50 µm LOMM (OM3 & OM4), Duplex SC, 12-fiber, zirconia ceramic sleeve	5F100-2QC
Plate (blue), SM (OS1 & OS2), Duplex SC, 12-fiber, zirconia ceramic sleeve	5F100-2LC
Plate (green), SM/APC (OS1 & OS2), Duplex SC, 12-fiber, zirconia ceramic sleeve	5F100-2VC
Plate (black), ST MM/SM, 6-fiber, zirconia ceramic sleeve	5F100-6MT
Plate (black), ST MM/SM, 8-fiber, zirconia ceramic sleeve	5F100-8MT
Plate (black), Blank	5F100-PLT

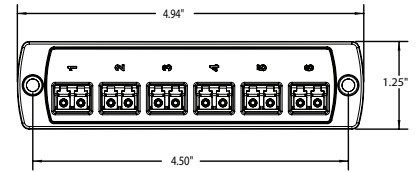


LC style

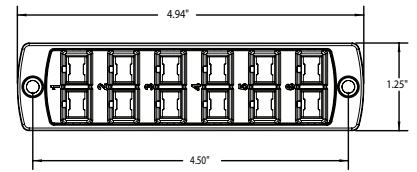

SC style

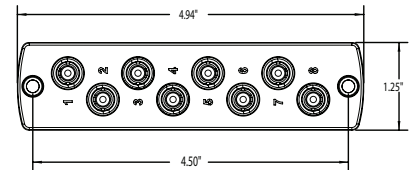

ST style

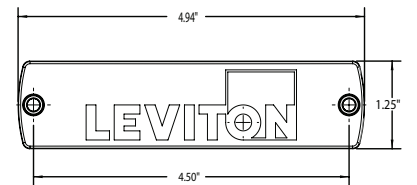

blank style

**5F100-xxx (precision molded)**

